



Digitized Automation for a Changing World

Delta Sensorless Vector Control Compact Drive VFD-EL-W Series



PLC1
www.deltaww.com



DELTA
Smarter. Greener. Together.

Sensorless Vector Control Compact Drive VFD-EL-W Series

*Simple Speed Control
Horizontal Movement
Fixed Load Applications*



Frame A1



Frame A2



Frame B

| Safety and Reliability



150% / 60secs overload capability



Energy-saving



CE certification

| Easy Maintenance



Natural cooling (Frame A1):
no maintenance required




Fan cooling (Frame A2, Frame B):
easy fan installation, reliable design,
fast dust removal



| Complete Functions



Single / multi-pump control:
constant pressure mode & alternative operation



Built-in PID feedback control



Protection: overload, over voltage / over current stall prevention

Applications

Edge Banding Machine

- Communication isolation reduces the interference of HMI
- One drive for two motors in parallel
- Optimized accel. / decel. improve system efficiency
- Small size, lightweight, easy maintenance and installation



Logistics Conveyor

- Built-in RS-485 COM port for high-speed communication
- Fast and stable tension control
- Small and compact design saves installation space



Material Handling Machine

- Multiple speed adjustment modes for different applications
- AVR function to ensure stability and reliability
- Speed tracking function for continuing operation after power resumes from an instantaneous power failure




Constant Pressure Pump

- Build-in PID pressure control; no need for external PID device to save system cost
- Built-in automatic inspection and restoration functions in case of water outage; no external PLC needed
- System leakage control function
- Multi-pump control: alternates pump operation in cycle (One drive supports max. 4 pumps)




Wiring

230V/460V Models

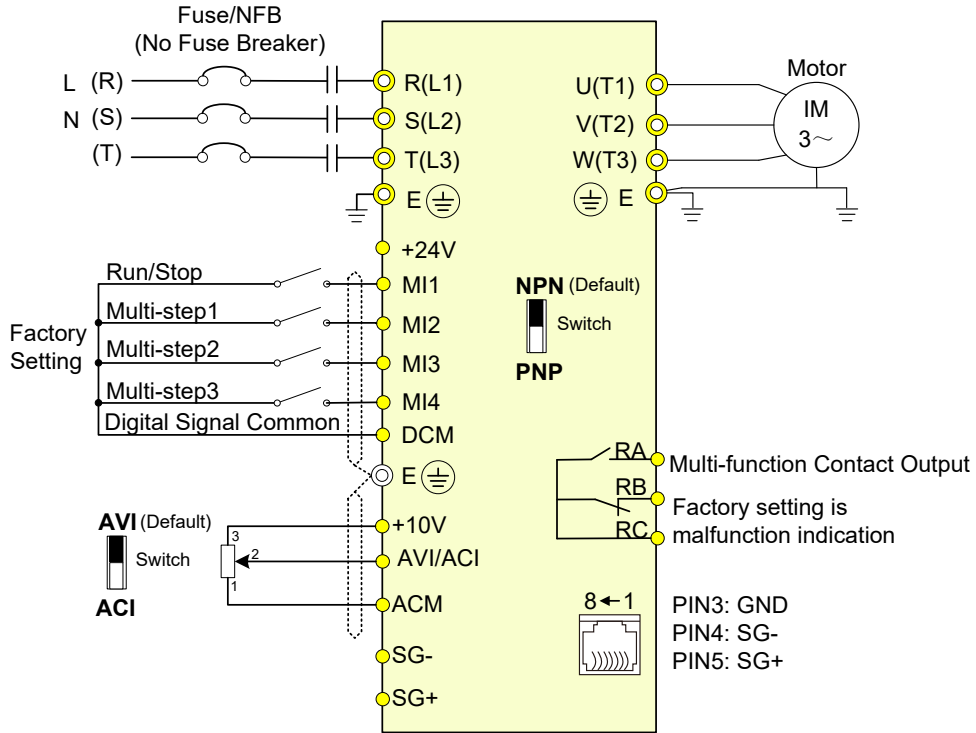


● Main Circuit (power) Terminals
 ● Control Circuit Terminals
 Shielded Leads & Cable
NOTE Terminal SG+, SG- are joined to PIN5, PIN4 of RJ45 Connector

Control Terminals

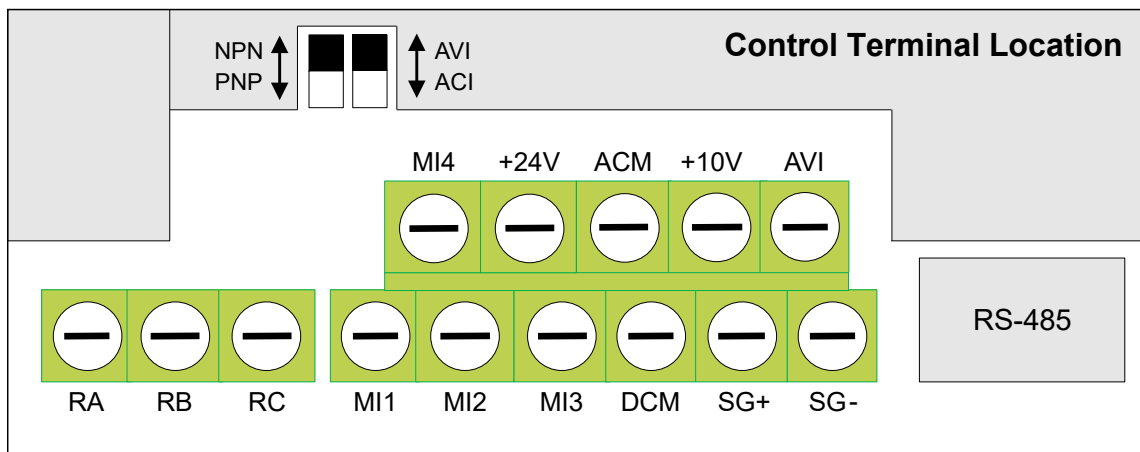


Frames and Appearances


■ Frame A1/A2

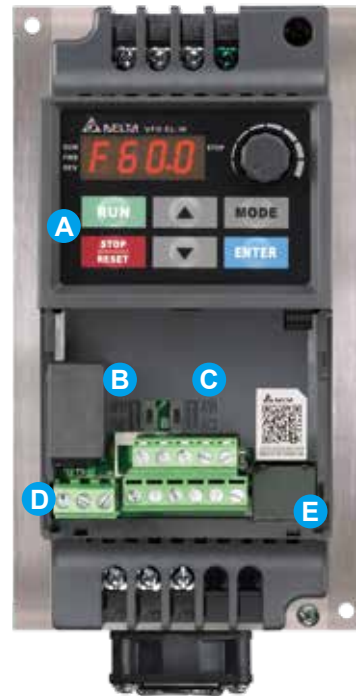

■ Frame B

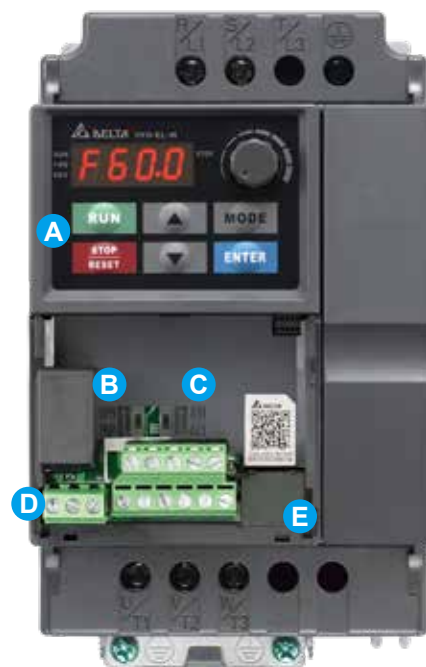

Model Explanation

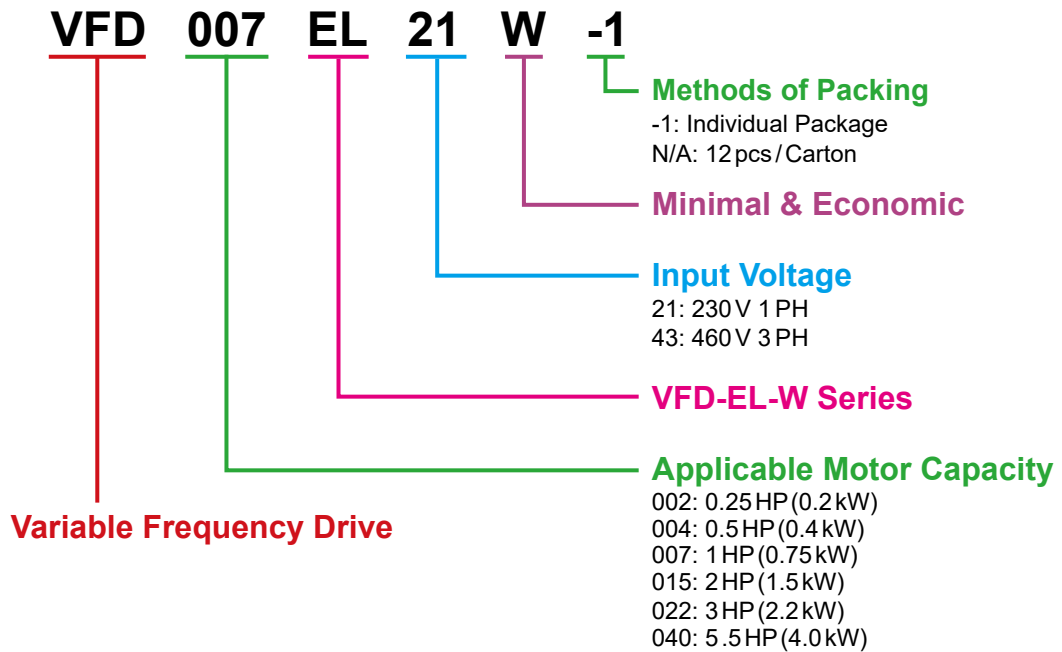


Specifications

Product Specifications

| Voltage | | 230V | | | | | 460V | | | | |
|-----------------------------------|-----------------------------|---|-----|------|-------------|------|--|------|-------------|-----|------|
| Frame | | A1 | | B | | | A1 | | A2 | B | |
| Model | VFD-__EL21W(-1) | 002 | 004 | 007 | 015 | 022 | 004 | 007 | 015 | 022 | 040 |
| | VFD-__EL43W(-1) | | | | | | | | | | |
| Max. Applicable Motor Output (kW) | | 0.2 | 0.4 | 0.75 | 1.5 | 2.2 | 0.4 | 0.75 | 1.5 | 2.2 | 4.0 |
| Max. Applicable Motor Output (HP) | | 0.25 | 0.5 | 1.0 | 2.0 | 3.0 | 0.5 | 1.0 | 2.0 | 3.0 | 5.5 |
| Output Rating | Rated Output Capacity (kVA) | 0.6 | 1.0 | 1.6 | 2.9 | 4.2 | 1.2 | 2.0 | 3.3 | 4.4 | 7.4 |
| | Rated Output Current (A) | 1.6 | 2.5 | 4.2 | 7.5 | 11.0 | 1.5 | 2.5 | 4.2 | 5.5 | 9.0 |
| | Maximum Output Voltage (V) | 3-Phase Proportional to Input Voltage | | | | | | | | | |
| | Output Frequency (Hz) | 0.1 ~ 400 | | | | | | | | | |
| | Carrier Frequency (kHz) | 2 ~ 12 (Default 8kHz) | | | | | | | | | |
| Input Rating | Rated Input Current (A) | 4.9 | 6.5 | 9.3 | 15.7 | 24.0 | 1.8 | 3.2 | 4.3 | 7.1 | 10.0 |
| | Rated Voltage / Frequency | Single Phase, AC 200V ~ 240V, 50 / 60Hz | | | | | Three Phase, AC 380V ~ 480V, 50 / 60Hz | | | | |
| | Voltage Tolerance | ±10% (180V ~ 264V) | | | | | ±10% (342V ~ 528V) | | | | |
| | Frequency Tolerance | ±5% (47Hz ~ 63Hz) | | | | | | | | | |
| Weight (kg) | | 1.0 | | | 1.4 | | 1.0 | | 1.4 | | |
| Cooling Method | | Natural Cooling | | | Fan Cooling | | Natural Cooling | | Fan Cooling | | |
| Brake Unit | | N/A | | | | | | | | | |
| DC Choke | | N/A | | | | | | | | | |
| EMI Filter | | N/A | | | | | | | | | |


Specifications

General Specifications

| | | | |
|---|---|---|--|
| Control Characteristics | Control System | | SPWM (Sinusoidal Pulse Width Modulation) control (V/F Control, Vector Control) |
| | Frequency Setting Resolution | | 0.01 Hz |
| | Output Frequency Resolution | | 0.01 Hz |
| | Torque Characteristics | | Including the auto-torque, auto-slip compensation; starting torque can be 150% at 5 Hz |
| | Overload Endurance | | 150% of rated current for 1 minute |
| | Skip Frequency | | Three zones, setting range 0.1 ~ 400 Hz |
| | Accel./Decel. Time | | 0.1 to 600 secs (2 independent setting for accel./decel. time) |
| | Stall Prevention Level | | Setting 20 to 250% of rated current |
| | DC Brake | | Operating frequency 0.1~400 Hz, Output 0 ~ 100% rated current Start time 0~60 secs, stop time 0~60 secs |
| V/F Pattern | | Adjustable V/F pattern | |
| Operating Characteristics | Frequency Setting | Keypad | Setting by ▲ ▼ |
| | | External Signal | Potentiometer: 5kΩ/0.5W, 0 to +10 VDC, 4 to 20 mA Multi-function input MI2 ~ MI4 (8 steps: Including the main speed, jog, up/down); RS-485 serial interface |
| | Operating Setting Signal | Keypad | Setting by RUN and STOP |
| | | External Signal | RUN/STOP by MI1 (default) or 2-wire/3-wire control (MI1, MI2, MI3), jog operation, RS-485 serial interface (Modbus) |
| | Multi-function Input Signal | | 8-speed switch (including the main speed): ban commands for acceleration/deceleration, 2-speed switch for accel./decel., counter, jogging (inching), external base block, driver reset, NPN/PNP inputs, AVI/ACI analog inputs Switch to a speed as the default. |
| Multi-function Output Signal (only Relays) | | AC drive operating, frequency attained, zero speed, counter, over-torque inspection, external base block, operating modes, anomaly alarm, overheating alarm, emergency stop | |
| Protection Functions | | Over voltage, over current, under voltage, anomalies, overload, overheating, electronic thermal relays, PTC overheating protection | |
| Operation Functions | | Built-in voltage regulators, accel./decel. S-curve, over-voltage/over-current stall prevention, 5 anomalous logs, reverse ban, restart for instantaneous power outage, DC brake, automatic toque/slip compensation and motor parameter adjustment, carrier frequency setting, output frequency limits, parameter reset, PID control, external counter, Modbus protocol, reset and restart for anomalies, energy-saving, fan control (for models with fans), 1 st /2 nd frequency sources and combination, NPN/PNP inputs | |
| Display Keypad (optional) | | 6 function keys, 4-digit 7-segment LED, 4 status LEDs, adjustable frequency, self-defined units, parameter settings and lock function, anomaly alarms, Run/Stop/Reset buttons | |
| Environmental Conditions | Enclosure Rating | | IP20 |
| | Pollution Degree | | 2 |
| | Installation Location | | Altitude 1,000m or lower, keeping from corrosive gases, liquids and dust |
| | Operating Temperature | | -10°C to 50°C (VFD007EL21W(-1) requires fan accessories) |
| | Storage/Transportation Temperature | | -20°C to 60°C |
| | Ambient Humidity | | Below 90% RH (non-condensing) |
| Vibration | | 1.0 mm, peak to peak 2–13.2 Hz; 0.7–1.0 G, 13.2–55 Hz; 1.0 G, 55–512 Hz; compliant with IEC 60068-2-6 | |
| Certification | |  , RoHS, GB 12668.3 | |

Dimensions

■ Frame A1

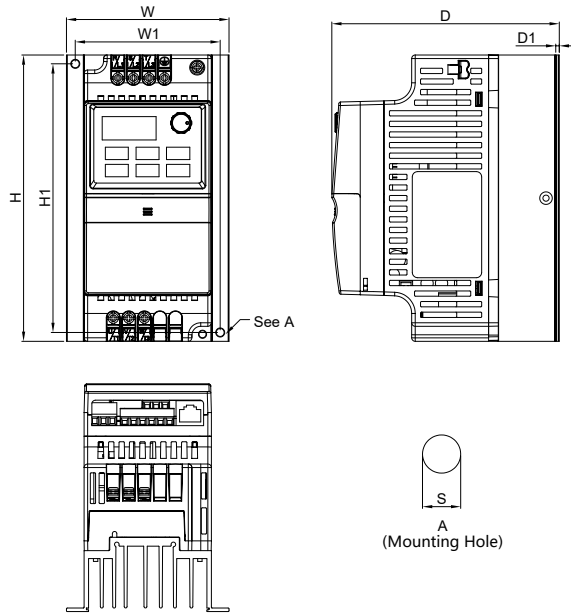


Model

- VFD002EL21W(-1)
- VFD004EL21W(-1)
- VFD004EL43W(-1)
- VFD007EL21W(-1)
- VFD007EL43W(-1)

| Frame | | W | W1 | H | H1 | D | D1 | S |
|-------|------|------|------|-------|------|-------|------|------|
| A1 | mm | 92.0 | 82.0 | 162.0 | 152 | 128.7 | 2.00 | 5.4 |
| | inch | 3.62 | 3.23 | 6.38 | 5.98 | 5.07 | 0.08 | 0.21 |

■ Frame A2

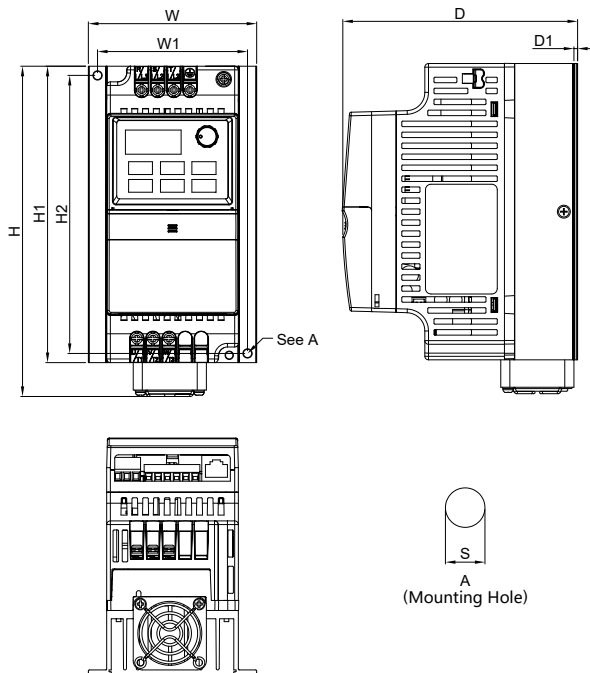


Model

- VFD015EL43W(-1)

| Frame | | W | W1 | H | H1 | H2 | D | D1 | S |
|-------|------|------|------|-------|-------|------|-------|------|------|
| A2 | mm | 92.0 | 82.0 | 180.5 | 162.0 | 152 | 128.7 | 2.00 | 5.4 |
| | inch | 3.62 | 3.23 | 7.11 | 6.38 | 5.98 | 5.07 | 0.08 | 0.21 |

■ Frame B

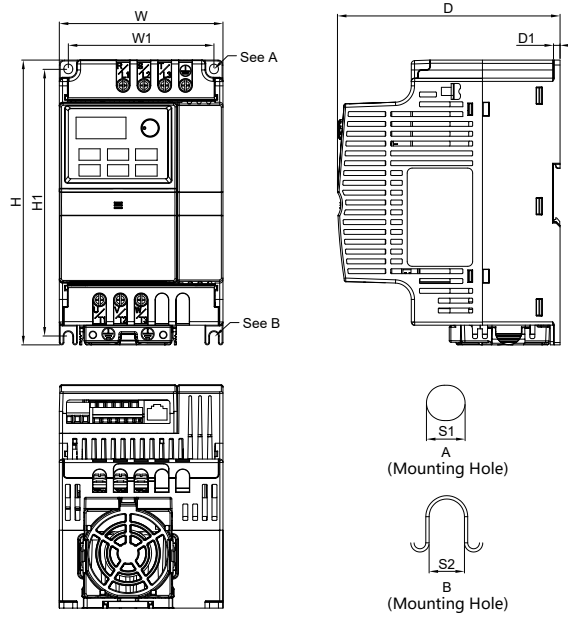




Model

- VFD015EL21W(-1)
- VFD022EL21W(-1)
- VFD022EL43W(-1)
- VFD040EL43W(-1)

| Frame | | W | W1 | H | H1 | D | D1 | S1 | S2 |
|----------|------|-------|------|-------|-------|-------|------|------|------|
| B | mm | 100.0 | 89.0 | 174.0 | 162.9 | 136.0 | 4.0 | 5.9 | 5.4 |
| | inch | 3.94 | 3.50 | 6.85 | 6.42 | 5.35 | 0.16 | 0.23 | 0.21 |

Ordering Information

| Frame | Cooling Method | Operating Temperature | Power Range | Models |
|--|-----------------|-----------------------|--|--|
| Frame A1  | Natural Cooling | -10°C~50°C | 230 V: 0.2~0.75 kW 460 V: 0.4~0.75 kW | VFD002EL21W(-1) VFD004EL21W(-1) VFD004EL43W(-1) VFD007EL21W(-1)* VFD007EL43W(-1) |
| Frame A2  | Fan Cooling | | 460 V: 1.5 kW | VFD015EL43W(-1) |
| Frame B  | | | 230 V: 1.5~2.2 kW 460 V: 2.2~4.0 kW | VFD015EL21W(-1) VFD022EL21W(-1) VFD022EL43W(-1) VFD040EL43W(-1) |



NOTE VFDxxxELxxW-1 and VFDxxxELxxW share the same electrical specifications.

*VFD007EL21W(-1): to reach 50°C operating temperature, a fan kit MKEL-AFKM1 is required (without derating).

*VFD007EL21W(-1): to reach 40°C operating temperature, no need for a fan kit (without derating).

Accessories

Keypad CE



VFD-PU06

- 5 digits
- Parameter duplication and recording
- RJ11 connector
- RS-485 communication



VFD-PU08V

- 4 digits
- RJ45 connector
- RS-485 communication



VFD-PU08

- 4 digits
- RJ45 connector
- RS-485 communication



* RJ45 cable is not included for VFD-PU08 & VFD-PU08V.

Cable

RJ45 Cable



| No. | Model | Length | |
|-----|---------------|--------|-------|
| | | mm | inch |
| 1 | UC-CMC003-01A | 300 | 11.8 |
| 2 | UC-CMC005-01A | 500 | 19.6 |
| 3 | UC-CMC010-01A | 1000 | 39.0 |
| 4 | UC-CMC015-01A | 1500 | 59.0 |
| 5 | UC-CMC020-01A | 2000 | 78.7 |
| 6 | UC-CMC030-01A | 3000 | 118.1 |
| 7 | UC-CMC050-01A | 5000 | 196.8 |

Fan kit

MKEL-AFKM1



Reactor

RF220X00A





Smarter. Greener. Together.

Industrial Automation Headquarters

Taiwan: Delta Electronics, Inc.

Taoyuan Technology Center
No.18, Xinglong Rd., Taoyuan District,
Taoyuan City 33068, Taiwan
TEL: +886-3-362-6301 / FAX: +886-3-371-6301

Asia

China: Delta Electronics (Shanghai) Co., Ltd.

No.182 Minyu Rd., Pudong Shanghai, P.R.C.
Post code : 201209
TEL: +86-21-6872-3988 / FAX: +86-21-6872-3996
Customer Service: 400-820-9595

Japan: Delta Electronics (Japan), Inc.

Industrial Automation Sales Department
2-1-14 Shibadaimon, Minato-ku
Tokyo, Japan 105-0012
TEL: +81-3-5733-1155 / FAX: +81-3-5733-1255

Korea: Delta Electronics (Korea), Inc.

1511, 219, Gasan Digital 1-Ro., Geumcheon-gu,
Seoul, 08501 South Korea
TEL: +82-2-515-5305 / FAX: +82-2-515-5302

Singapore: Delta Energy Systems (Singapore) Pte Ltd.

4 Kaki Bukit Avenue 1, #05-04, Singapore 417939
TEL: +65-6747-5155 / FAX: +65-6744-9228

India: Delta Electronics (India) Pvt. Ltd.

Plot No.43, Sector 35, HSIIDC Gurgaon,
PIN 122001, Haryana, India
TEL: +91-124-4874900 / FAX: +91-124-4874945

Thailand: Delta Electronics (Thailand) PCL.

909 Soi 9, Moo 4, Bangpoo Industrial Estate (E.P.Z),
Pattana 1 Rd., T.Phraksa, A.Muang,
Samutprakarn 10280, Thailand
TEL: +66-2709-2800 / FAX: +66-2709-2827

Australia: Delta Electronics (Australia) Pty Ltd.

Unit 20-21/45 Normanby Rd., Notting Hill Vic 3168, Australia
TEL: +61-3-9543-3720

Americas

USA: Delta Electronics (Americas) Ltd.

5101 Davis Drive, Research Triangle Park, NC 27709, U.S.A.
TEL: +1-919-767-3813 / FAX: +1-919-767-3969

Brazil: Delta Electronics Brazil

Rua Itapeva, 26 - 3º, andar Edifício Itapeva,
One - Bela Vista 01332-000 - São Paulo - SP - Brazil
TEL: +55-12-3932-2300 / FAX: +55-12-3932-237

Mexico: Delta Electronics International Mexico S.A. de C.V.

Gustavo Baz No. 309 Edificio E PB 103
Colonia La Loma, CP 54060
Tlalnepantla, Estado de México
TEL: +52-55-3603-9200

EMEA

EMEA Headquarters: Delta Electronics (Netherlands) B.V.

Sales: Sales.IA.EMEA@deltaww.com
Marketing: Marketing.IA.EMEA@deltaww.com
Technical Support: iatechnicalsupport@deltaww.com
Customer Support: Customer-Support@deltaww.com
Service: Service.IA.emea@deltaww.com
TEL: +31(0)40 800 3900

BENELUX: Delta Electronics (Netherlands) B.V.

Automotive Campus 260, 5708 JZ Helmond, The Netherlands
Mail: Sales.IA.Benelux@deltaww.com
TEL: +31(0)40 800 3900

DACH: Delta Electronics (Netherlands) B.V.

Coesterweg 45, D-59494 Soest, Germany
Mail: Sales.IA.DACH@deltaww.com
TEL: +49(0)2921 987 0

France: Delta Electronics (France) S.A.

ZI du bois Challand 2, 15 rue des Pyrénées,
Lisses, 91090 Evry Cedex, France
Mail: Sales.IA.FR@deltaww.com
TEL: +33(0)1 69 77 82 60

Iberia: Delta Electronics Solutions (Spain) S.L.U

Ctra. De Villaverde a Vallecas, 265 1º Dcha Ed.
Hormigueras – P.I. de Vallecas 28031 Madrid
TEL: +34(0)91 223 74 20

Carrer Llacuna 166, 08018 Barcelona, Spain

Mail: Sales.IA.Iberia@deltaww.com

Italy: Delta Electronics (Italy) S.r.l.

Via Meda 2-22060 Novedrate(CO)
Piazza Grazioli 18 00186 Roma Italy
Mail: Sales.IA.Italy@deltaww.com
TEL: +39 039 8900365

Russia: Delta Energy System LLC

Vereyskaya Plaza II, office 112 Vereyskaya str.
17 121357 Moscow Russia
Mail: Sales.IA.RU@deltaww.com
TEL: +7 495 644 3240

Turkey: Delta Greentech Elektronik San. Ltd. Sti. (Turkey)

Şerifali Mah. Hendem Cad. Kule Sok. No:16-A
34775 Ümraniye – İstanbul
Mail: Sales.IA.Turkey@deltaww.com
TEL: + 90 216 499 9910

MEA: Eltek Dubai (Eltek MEA DMCC)

OFFICE 2504, 25th Floor, Saba Tower 1,
Jumeirah Lakes Towers, Dubai, UAE
Mail: Sales.IA.MEA@deltaww.com
TEL: +971(0)4 2690148